


2.6 TONNE WIDE JACKING BEAM - SD26L-W

WIDE JACKING BEAM 2.6T - CLASS 7 MOT COMPLAINT

Item number: N/A

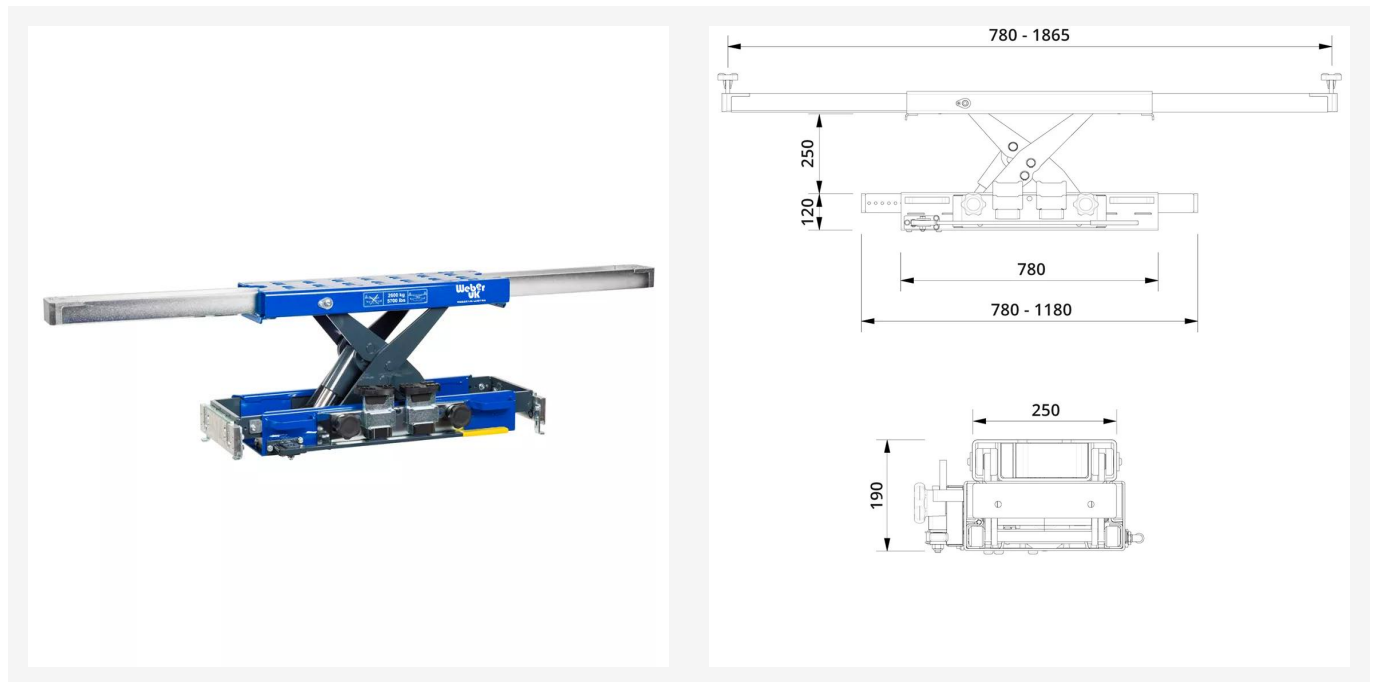

DESCRIPTION

- Suitable for Class 7 MOT applications
- Flexible top support beam can be extended up to 1865 mm
- Closed height of only 190 mm optimal for vehicles with a low clearance
- Unique height adjustable mounting bracket system to fit any lift
- Two-hand lowering operation with dead man's release
- Supplied with 3 extension sets (10/40/85 mm) and rubber cushion for protection of car body
- Ideal for Electric Vehicles - lifting points outside of any battery frame, ensuring lifting without damage to the battery pack

SPECIFICATIONS

Capacity (kg):	2,600
Stroke (mm):	250
Minimum Height (mm):	190
Telescopic Arm (mm):	780 - 1865
Width [Without Support Arms] (mm):	780 - 1180
Lifting Frame Height (mm):	120
Lifting Frame Depth (mm):	250
Weight (kg):	120

ACCESSORIES: N/A

130mm Metal Extension Piece for SD Jacking Beams

Item number: 0a09c8844ba8



40mm High Rubber Support Block for the protection of the car body.

Item number: 2b24d495052a



80mm High Rubber Support Block for protection of the the car body.

Item number: a5e00132373a



Adjustable saddle with spindle which increases the lifting height by 106-240mm for SD Jacking Beams

Item number: 8d5e957f2978



Adjustable Saddle which increases the lifting height by 32-92mm for SD Jacking Beams

Item number: 47d1e990583c



Airline Connection Set for jacking beam

Item number: 903ce9225fca



**For the FSD6 which increases
the lifting height by 60mm**

Item number: f2217062e9a3



**Rubber cushion to be used
with the S-Saddle for
protection of car body**

Item number: 43ec517d68b6



**Rubber Saddle For 10mm
Extension**

Item number: a8f15eda80c5

